


Drawings are not to scale.

## QuickEdge® Decorative Protective Trim

### Flexible Embossed Vinyl Metal Core QuickEdge® Trims

#### 3/4" Trim


for 5/8" to 3/4" Edges  
Grips edges from  
.670" to .750" thick



PART NO.	DESCRIPTION	CARTON FEET
75001838	Black Sof-Tone	100

#### "Q" Trim


for 3/16" to 1/4" Edges  
Grips edges from  
.135" to .250" thick

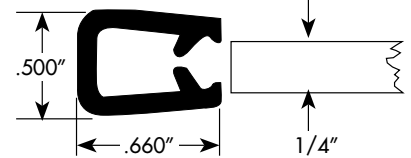

PART NO.	DESCRIPTION	CARTON FEET
75000343	Black Sof-Tone	250
75000344	White Sof-Tone	250
75001841	Black Granular	250

#### 5/8" Trim


for 1/2" to 5/8" Edges  
Grips edges from  
.520" to .625" thick



PART NO.	DESCRIPTION	CARTON FEET
75001837	Black Sof-Tone	100

#### Special Single Lip Trim


for 1/8" to 3/16" Edges  
Grips edges from  
.090" to .180" thick

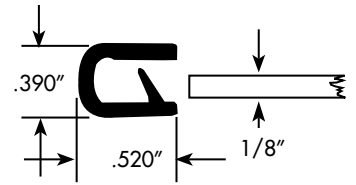

PART NO.	DESCRIPTION	CARTON FEET
75000721	Black Sof-Tone	400
75000722	White Sof-Tone	400
75001638	Black Granular	400

#### 1/2" Trim


for 3/8" to 1/2" Edges  
Grips edges from  
.250" to .500" thick



PART NO.	DESCRIPTION	CARTON FEET
75000349	Black Sof-Tone	150
75001628	White Sof-Tone	150

#### Standard Single Lip Trim


for 1/8" to 3/16" Edges  
Grips edges from  
.090" to .190" thick

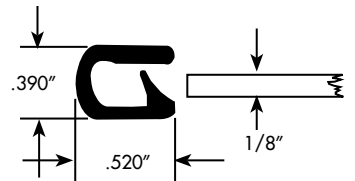

PART NO.	DESCRIPTION	CARTON FEET
75000328	White Basketweave	400
75000329	Black Basketweave	400
75000330	White Sof-Tone	400
75000331	White Sof-Tone	100
75000334	Black Sof-Tone	400
75000708	Black Sof-Tone	100

#### 1/4" Chrome Pad Trim

for 3/16" to 1/4" Edges  
Grips edges from  
.150" to .300" thick

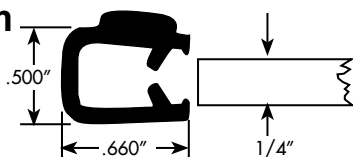

PART NO.	DESCRIPTION	CARTON FEET
75000702	Black Sof-Tone Chrome Pad	200

#### Safety Color Trim

75000332	Safety Orange Sof-Tone	100
75000333	Safety Yellow Sof-Tone	100




Drawings are not to scale.

## QuickEdge® Decorative Protective Trim

### Flexible Embossed Vinyl Metal Core QuickEdge® Trims

#### Decorative Single Lip Trim


for 1/8" to 3/16" Edges  
Grips edges from  
.090" to .190" thick



PART NO.	DESCRIPTION	CARTON FEET
75000361	Black Sof-Tone Chrome Pad	300
75001002	Black Sof-Tone Chrome Pad	100

#### Pinch Top Single Lip Trim


for 1/8" Edges  
Grips edges from .060" to .170" thick



PART NO.	DESCRIPTION	CARTON FEET
75000336	Black Basketweave	400
75000337	White Sof-Tone	400
75000338	Black Sof-Tone	400
75001844	Black Granular	400

#### Decorative Long Leg Trim


for 1/8" to 3/16" Edges  
Grips edges from  
.085" to .210" thick



PART NO.	DESCRIPTION	CARTON FEET
75000363	Black Sof-Tone Chrome Pad	300
75001144	Black Sof-Tone Gold Pad	300

#### Standard Double Lip Trim


for 1/32" to 1/8" Edges  
Grips edges from  
.032" to .125" thick



PART NO.	DESCRIPTION	CARTON FEET
75000315	Black Basketweave	400
75000316	Black Sof-Tone	400
75000317	Black Sof-Tone	100
75000319	Green Sof-Tone	100
75000320	Aqua Sof-Tone	100
75000321	Gray Sof-Tone	100
75000322	Fawn Sof-Tone	100
75000323	Off-White Sof-Tone	100
75000325	Red Sof-Tone	100
75000326	Blue Sof-Tone	100
75000327	Brown Sof-Tone	100
75001007	White Sof-Tone	100
75001565	White Sof-Tone	400
75001842	Black Granular	100

#### Long Leg Single Lip Trim

for 1/8" to 3/16" Edges  
Grips edges from  
.085" to .210" thick



PART NO.	DESCRIPTION	CARTON FEET
75000339	Black Sof-Tone	300
75001843	Black Granular	300




Drawings are not to scale.

## QuickEdge® Decorative Protective Trim

### Flexible Embossed Vinyl Metal Core QuickEdge® Trims

#### Minitrim


for 1/32" Edges  
Grips edges from  
.010" to .050" thick



PART NO.	DESCRIPTION	CARTON FEET
75000341	Black Sof-Tone	500
75000342	White Sof-Tone	500
75001637	Black Granular	500

#### Mini "Minitrim"

for 1/32" Edges  
Grips edges from  
.010" to .030" thick



PART NO.	DESCRIPTION	CARTON FEET
75001581	Black Sof-Tone	400
75002050	White Sof-Tone	400

### Advantages and Physical Characteristics

**Environmentally Safe Vinyl** - Embossed PVC extrusions with non-cadmium stabilizers

**Segmented Metal Core** - Cold rolled steel .018" thick, #2 temper

**Flexible Durometer** - All parts are 65 durometer except the Standard Double Lip Trims which are 80 durometer hardness (share A 15 second delay)

**Tensile Strength** - 2200 P.S.I. / Minimum

**Elongation** - 300% minimum

**Cold Impact** - Will withstand 1-1/2 foot pound impact at -20° F

**Heat Resistance** - 150° F maximum for continuous use

**Flammability** - Self extinguishing, passes Federal Spec. FMVSS-302

